

06/13/00

05532944 061300



Jc685 U.S. PTO

# UTILITY PATENT APPLICATION UNDER 37 CFR 1.53(b)

Assistant Commissioner for Patents  
Washington D.C. 20231

Case Docket No. 1509-113

Sir:

Transmitted herewith for filing is the patent application of:

INVENTOR: Richard Oliver KAHN  
FOR: STROBE FLASH PHOTOGRAPHIC ILLUMINATION

Enclosed are:

- ☒ [ X ] 24 pages of specification, claims, abstract
- ☒ [ X ] Declaration & Power of Attorney
- ☒ [ X ] Priority Claimed
- ☒ [ X ] Certified copy of European Patent Application 99304656.4
- ☒ [ X ] An assignment of the invention to Hewlett-Packard Company and the assignment recordation fee
- ☒ [ X ] Return Receipt Postcard
- ☒ [ X ] Information Disclosure Statement, Form PTO-1449
- ☒ [ X ] Copies of IDS Citations
- ☐ [ ] Change of Address
- ☒ [ X ] Preliminary Amendment

The filing fee has been calculated as shown below:

	NO. FILED		NO. EXTRA	RATE	AMOUNT
Total Claims	15	MINUS 20	0	x \$18 =	\$ 0.00
Independent Claims	4	MINUS 3	0	x \$78 =	\$ 78.00
If multiple dependent claims are presented, add \$260.00					\$0.00
Basic Fee					\$ 690.00
Total of above calculations					\$ 768.00
<input checked="" type="checkbox"/> [ X ] Assignment and Recording Fee					\$40.00
<b>TOTAL FEE</b>					<b>\$ 808.00</b>

Jc531 U.S. PTO

09/592944



06/13/00

- [ X ] A check in the amount of \$ 808.00 is attached
- [ ] Please charge my Deposit Account No. 07-1337 in the amount of \$ .00. A duplicate copy of this sheet is enclosed.
- [ X ] The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 07-1337. A duplicate copy is enclosed.
- [ X ] Any additional filing fees required under 37 CFR 1.16.
- [ X ] The Commissioner is hereby authorized to charge payment of following fees during the pendency of this application or credit any overpayment to Deposit Account No. 07-1337. A duplicate copy of this sheet is enclosed.
- [ X ] Any patent application processing fees under 37 CFR 1.17.
- [ X ] Any filing fees under 37 CFR 1.16 for presentation of extra claims.

Respectfully submitted,

LOWE HAUPTMAN GOPSTEIN GILMAN & BERNER, LLP



Allan M. Lowe  
Registration No. 19,641

1700 Diagonal Road, Suite 310  
Alexandria, Virginia 22314  
(703) 684-1111  
(703) 518-5499 Facsimile  
Date: June 13, 2000  
AML/rl

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Application of	:
	:
Richard Oliver Kahn	:
	:
Serial No. Not Yet Assigned	: Group Art Unit: Unknown
	:
Filed: June 13, 2000	: Examiner: Unknown
	:
For: STROBE FLASH PHOTOGRAPHIC ILLUMINATION	

**PRELIMINARY AMENDMENT**

Assistant Commissioner for Patents  
Washington, D. C. 20231

Sir:

Prior to examination on the merits, please amend the referenced application as follows:

**IN THE CLAIMS:**

1. A camera [(2,102)] comprising [an] a detector for image capture [means (52)], an objective lens [(14,114)] with a field of view [(18,118)] to image optical radiation [(19,119)] from an object plane [(8)] onto the detector for image capture [means (52)], a strobe flash [(16,116)] for illuminating the object plane [(8)], electronic pulse circuitry [(60,160)] to pulse [(75)] the strobe flash [(16,116)] at a rate which is sufficiently quick that the illumination appears to a user of the camera [(2,102)] to be substantially steady owing to persistence of vision, and a shutter [means (104)] to synchronise the capture of one or more images by the detector for image capture [means (52)], each image being captured with at least one pulse [(75)] from the strobe flash [(16,116), characterised in that], wherein the shutter [means (104)] is adapted to

capture images at a rate substantially below the rate at which the strobe flash [(16,116)] is pulsed.

2. A camera [(2,102)] as claimed in [any preceding] claim 1, in which the pulse circuitry [(160)] is arranged to ramp up [(45)] the perceived intensity of the steady illumination prior to the capture of the image, and/or to ramp down [(49)] said intensity after capture of the image.

3. A camera [(2,102)] as claimed in Claim 2, in which the ramp up [(45)] and/or ramp down [(49)] of the perceived intensity of the steady illumination takes place over at least 0.25 second.

4. A camera [(2,102)] as claimed in Claim 2 [or Claim 3], in which the ramp up [(45)] and/or ramp down [(49)] of the perceived intensity of the steady illumination takes place over less than 1 second.

5. A camera [(2,102)] as claimed in [any preceding] claim 1, in which the rate at which the strobe flash [(16,116)] is pulsed [(75)] is at least 50 Hz.

6. A camera [(2,102)] as claimed in [any preceding] claim 1 in which the rate at which the strobe flash [(16,116)] is pulsed [(75)] is at least 10 times higher than the image capture rate.

7. A camera [(2,102)] as claimed in [any preceding] claim 1, in which the detector for image capture [means] is an electronic detector [(52)] array, the shutter [means] comprising electronic control circuitry [(104)] to synchronise the capture of an image by the detector array [(52)] with the strobe flash [(16,116)].

8. A camera [(102)] as claimed in Claim 7, in which the camera [(102)] includes an actuator [(24)] to scan [(26,30)] the field of view [(18,118)] of the objective lens [(14,114)] in the object plane [(8)] as the control circuitry [(104)] captures images of different fields of view [(118)].

9. A camera [(102)] as claimed in Claim 8, in which the actuator [(24)] scans the field of view [(118)] of the objective lens [(114)] continuously as the control circuitry [(104)] captures images of different fields of view [(118)].

10. A camera [(2)] as claimed in [any preceding] claim 1, in which the camera is a hand-held camera [(2)].

11. A document scanning system [(101)] comprising a camera [(102)], the camera [being as claimed in Claim 8 or Claim 9] comprising an electronic detector array for image capture, an objective lens with a field of view to image optical radiation from an object plane onto the electronic detector array, a strobe flash for illuminating the object plane, electronic pulse circuitry to pulse the strobe flash at a rate which is sufficiently quick that the illumination appears to a user of the camera to be substantially steady owing to persistence of vision, and a shutter comprising electronic control circuitry to synchronise the capture of an image by the detector array with the strobe flash, each image being captured with at least one pulse from the strobe flash, wherein the shutter is adapted to capture images at a rate substantially below the rate at which the strobe flash is pulsed, the camera further including an actuator to scan the field of view of the objective lens in the object plane as the control circuitry captures images of different fields of view; the document scanning system further comprising [, and] a mount [(110)] by which the camera [(102)] may be positioned to image onto the electronic detector array[(52)] a portion of a document [(6)] in the object plane [(8)], wherein the actuator [(24)] is operable to scan [(26,30)] the field of view [(118)] of the objective lens [(114)] as the control circuitry [(104)] captures images of different portions of the document [(6)].

12. A document imaging system [(101)] as claimed in Claim 11, in which the system comprises [means (104)] a processor adapted to execute a stitching algorithm by which images captured from adjacent or overlapping fields of view [(118)] can be joined into a composite image of the adjacent or overlapping fields [(118)].

13. A method of imaging a document using a camera [(102), the camera being as claimed in Claim 8 or Claim 9,] comprising an electronic detector array for image capture, an objective lens with a field of view to image optical radiation from an

object plane onto the electronic detector array, a strobe flash for illuminating the object plane, electronic pulse circuitry to pulse the strobe flash at a rate which is sufficiently quick that the illumination appears to a user of the camera to be substantially steady owing to persistence of vision, and a shutter comprising electronic control circuitry to synchronise the capture of an image by the detector array with the strobe flash, each image being captured with at least one pulse from the strobe flash, wherein the shutter is adapted to capture images at a rate substantially below the rate at which the strobe flash is pulsed, the camera further including an actuator to scan the field of view of the objective lens in the object plane as the control circuitry captures images of different fields of view;

[characterised in that] wherein the method comprises the steps of:

- a) aiming the camera [(102)] at a document [(6)] in the object plane [(8)] so that a portion of the document [(6)] falls within the field of view [(118)]; and
- b) using the actuator [(24)] to scan [(26,30)] the field of view [(118)] of the objective lens [(114)] as the control circuitry [(104)] captures images of different portions of the document [(6)].

14. A method of scanning a document using a document scanning system [(101)], the document scanning system [being as claimed in Claim 10 or Claim 11, ] comprising a camera, the camera comprising an electronic detector array for image capture, an objective lens with a field of view to image optical radiation from an object plane onto the electronic detector array, a strobe flash for illuminating the object plane, electronic pulse circuitry to pulse the strobe flash at a rate which is sufficiently quick that the illumination appears to a user of the camera to be substantially steady owing to persistence of vision, and a shutter comprising electronic control circuitry to synchronise the capture of an image by the detector array with the strobe flash, each image being captured with at least one pulse from the strobe flash, wherein the shutter is adapted to capture images at a rate substantially below the rate at which the strobe flash is pulsed, the camera further including an actuator to scan the field of view of the objective lens in the object plane as the control circuitry captures images of different fields of view; the document scanning

system further comprising a mount by which the camera may be positioned to image onto the electronic detector array a portion of a document in the object plane, wherein the actuator is operable to scan the field of view of the objective lens as the control circuitry captures images of different portions of the document

[characterised in that] wherein the method comprises the steps of:

[c)] a) mounting [(110)] the camera [(102)] to image onto the detector [(52)] a portion of a document [(6)] in the object plane [(8)]; and

[d)] b) using the actuator [(24)] to scan [(26,30)] the field of view [(118)] of the objective lens [(114)] as the control circuitry [(104)] captures images of different portions of the document [(6)].

15. A method of scanning a document as claimed in Claim 14 [when appendant from Claim 12] wherein the document scanning system further comprises a processor adapted to execute a stitching algorithm by which images captured from adjacent or overlapping fields of view can be joined into a composite image of the adjacent or overlapping fields, in which the method comprises after step [d)] b) the step of:

[e)] c) joining images captured from adjacent or overlapping fields of view [(118)] into a composite image of the document.


R E M A R K S

The claims have been amended to eliminate reference numerals and to eliminate the multiple dependency thereof. They have also been amended to comply with U.S. practice.

Entry of the Amendment is respectfully requested and deemed in order.

Very truly yours,

LOWE HAUPTMAN GOPSTEIN GILMAN & BERNER, LLP

A handwritten signature in black ink, appearing to read "Allan M. Lowe". The signature is fluid and cursive, with the first name "Allan" and last name "Lowe" being more prominent than the middle initial "M".

Allan M. Lowe  
Registration No. 19,641

1700 Diagonal Road, Suite 310  
Alexandria, Virginia 22314  
(703) 684-1111  
(703) 518-5499 Facsimile  
Date: June 13, 2000  
AML:rl



## Strobe Flash Photographic Illumination

The present invention relates to a camera with strobe flash illumination for capturing an image of an object, and to a document scanning system and method of using such a camera to capture an image of a document.

In recent years, document scanners have become commonplace. Although these work well and are relatively inexpensive, a document scanner occupies a significant amount of scarce desk space.

The use of a camera to take a photograph of a document consisting of text and/or images offers one way of dealing with the problem of wasted desk space. In conventional film or electronic photography, a person may look through a viewfinder to aim the camera at an object. When the object is a document, for example a document lying on a desk in an office illuminated by ambient light from windows and overhead lighting, it will usually be necessary to use an additional source of light, such as a conventional electronic flash synchronised with a mechanical shutter or electronic capture of the image. Often a person has to stand up, lean over the document, and then take the photograph, in which case, the person's body may block ambient light, thereby requiring the use of a flash even if the ambient light is bright.

Such a flash reduces exposure time and therefore helps to reduce or substantially eliminate camera shake or other relative movement between the camera and an object in an object plane of the camera, particularly when the camera is hand-held. A flash also provides light with a known colour temperature to produce an image that is a true colour. When a photograph is to be taken of an object with a shiny or glossy surface, then ambient light can at

certain angles be reflected from the surface and overwhelm the image of the document itself. In this case, a flash can provide sufficient illumination to overcome such stray reflections so that the document can be correctly imaged.

5

Although conventional flash units are effective in dealing with these problems, a bright flash of light from such a unit can be startling or annoying to anyone nearby. Even if a person is partially shielded directly from such a flash, for example by an office cubical, the eye is very sensitive to any sudden flicker of light. For this reason it is generally considered unacceptable to use conventional flash illumination in many environments, particularly in an office environment, where others could be disturbed by a flash.

Digital camera products are becoming common in many areas of still and motion photography, and as a result are becoming ever less expensive. However such cameras are still used almost exclusively for photography of people or places, and have yet to be adapted for use in office imaging applications. One reason for this is that most electronic cameras, which normally employ two dimensional CCD arrays, have insufficient resolution to image a complete A4 size page at 300 dots per inch, the minimum that is conventionally believed necessary for reasonably high quality reproduction. Whilst higher resolution CCDs are available in electronic cameras, they are much too expensive for a mass-market office imaging product.

30

As a result cameras with flash attachments and electronic cameras are not widely used in place of document scanners in an office environment.

35 It is an object of the present invention to provide a convenient and relatively unobtrusive camera with flash

illumination, document scanning system and method of using such a camera to capture an image of a document.

Accordingly, the invention provides a camera, comprising  
5 an image capture means, an objective lens with a field of view to image optical radiation from an object plane onto the image capture means, a strobe flash for illuminating the object plane, electronic pulse circuitry to pulse the strobe flash at a rate which is sufficiently quick that  
10 the illumination appears to a user of the camera to be substantially steady owing to persistence of vision, and a shutter means to synchronise the capture of one or more images by the image capture means, each image being captured with at least one pulse from the strobe flash,  
15 characterised in that the shutter means is adapted to capture images at a rate substantially below the rate at which the strobe flash is pulsed.

Because the pulsed strobe flash appears to be a continuous  
20 light, the illumination can be much less obtrusive than a single flash synchronised with the shutter means. The illumination can be no more distracting than a person turning a light such as a desk lamp on, and then off.

25 The image capture means may be photographic film or at least one electronic detector array, for example a two dimensional CCD array. In most applications, it is preferred if the image capture means is a detector array, owing to the greater sensitivity at low light levels. This  
30 permits a reduction in strobe flash energy compared with that needed with many types of photographic film.

The shutter means may be a mechanical shutter in the case of photographic film. If a detector array is used, then  
35 there is no need for a mechanical shutter, and circuitry on or associated with the detector array can be used to

capture and then to gate out an electronic signal representative of light levels on the detector array.

5 An electronic "shutter" has, of course, no moving parts  
and so a detector array may in principle be capable of  
collecting data representative of images at a rate  
comparable with the strobe flash rate. The invention is  
concerned with still photography rather than motion  
10 photography. Even if an electronic camera were capable of  
collecting data relating to a number of still images in  
quick succession, in still photography there is no need or  
desire to keep such surplus or transitory images, and so  
the number of images actually used will be substantially  
15 less than the number of strobe flashes. The term  
"captured" as used herein therefore relates to captured  
images that are more than just transitorily captured, but  
which may be used or kept as in still photography.

20 The perception of steady illumination can be achieved if  
the pulse rate of the strobe flash is at least 50 Hz. Some  
conventional still cameras, even those with mechanical  
shutters, are capable of taking up to about five still  
photographs per second. One definition an image capture  
rate substantially below the strobe flash rate would  
25 therefore be that the strobe flash rate is at least ten  
times higher than the image capture rate.

30 In many applications, however, just one image will need to  
be captured. For the illumination to be unobtrusive, it is  
preferable if the illumination is steady for at least  
about one second. For strobe pulses of at least 50 Hz, it  
is therefore preferred if the strobe flash rate is at  
least 50 times higher than the image capture rate.

35 The illumination can be made less intrusive if the pulse  
circuitry is arranged to ramp up the perceived intensity

of the steady illumination prior to the capture of the image, and/or to ramp down said intensity after capture of the image. In terms of human perception of the intrusiveness of the illumination, the ramp up in  
5 intensity gives a greater benefit than the ramp down in intensity, but most preferably the illumination is ramped both up and down in intensity.

Preferably, the ramp up and/or ramp down of the perceived  
10 intensity of the steady illumination takes place over at least 0.25 second.

Therefore, the camera may include means by which the illumination may be dimmed. Such means may include an  
15 electrical energy storage circuit that stores charge up to a maximum limit. Circuitry may then be provided that controllably discharges at least some of the stored energy prior to a flash lamp pulse.

20 Often it will be desirable to conserve electrical power, for example if the camera electronic circuitry is powered by a rechargeable battery. This will place a limit on the duration of the steady illumination, and also on the length of time for any ramp up/down in illumination.  
25 Preferably, the ramp up and/or ramp down of the perceived intensity of the steady illumination takes place over less than one second.

When the image capture means is an electronic detector  
30 array, the shutter means may comprise electronic control circuitry to synchronise the capture of an image by the detector array with the strobe flash.

In document imaging applications, it is preferred to use  
35 inexpensive detector arrays. These, however, have insufficient resolution to capture an A4 page at 300 dpi.

Therefore, the camera may include an actuator to scan the field of view of the objective lens in the object plane as the control circuitry captures images of different fields of view. In this case, the strobe flash may be used to  
5 effectively freeze any relative motion between the object plane and the camera. Therefore, there is no need for the actuator to stop motion when an image is to be captured, and so the actuator may scan the field of view of the objective lens continuously, i.e. without stopping, as the  
10 control circuitry captures images of different fields of view. This simplifies the control of the actuator and allows a more rapid capture of several images one after the other.

15 The camera may be a hand-held camera, in which case the strobe flash will help to reduce or eliminate the effect of any camera shake.

However, the preferred embodiment of the invention relates  
20 to a document scanning system comprising a camera with an actuator as described above, and with a mount by which the camera may be positioned to image onto the detector a portion of a document in the object plane. The mount may be a stand that rests on or that can be affixed to a work  
25 surface such as an office desk.

The actuator is then operable to scan the field of view of the objective lens as the control circuitry captures images of different portions of the document. This permits  
30 a relatively low resolution but inexpensive detector array to be used to build up a composite image of a document. Therefore, the system may comprise means by which images captured from adjacent or overlapping fields of view can be joined into a composite image of the adjacent or  
35 overlapping fields.

Also according to the invention, there is provided a method of imaging a document using a camera with an actuator as described above, characterised in that the method comprises the steps of:

5

a) aiming the camera at a document in the object plane so that a portion of the document falls within the field of view; and

10

b) using the actuator to scan the field of view of the objective lens as the control circuitry captures images of different portions of the document.

15

Furthermore, the invention provides a method of scanning a document using a document scanning system, using a camera with an actuator and a mount as described above, characterised in that the method comprises the steps of:

20

c) mounting the camera to image onto the detector a portion of a document in the object plane; and

25

The invention will now be further described by way of example only, and with reference to the accompanying drawings, in which:

30

Figure 1 is a perspective view of a camera and a document imaging system according to the first embodiment of the invention;

35

Figure 2 is a perspective view of a camera and a document imaging system according to a second embodiment of the invention;

Figure 3 is a schematic view in cross-section of the camera and document imaging system of Figure 2;

5        Figure 4 is a plot of intensity from a strobe flash lamp unit for a camera according to the invention, showing a ramp up in intensity followed by a constant intensity and then a ramp down in intensity;

10       Figure 5 is a diagram of a circuit for pulsing the strobe flash lamp with a constant illumination;

15       Figure 6 is a plot of waveforms in the circuit diagram of Figure 6;

20       Figure 7 is a diagram of a circuit for pulsing the strobe flash with a constant or a variable intensity; and

25       Figure 8 is a plot of waveforms in the circuit of Figure 7.

Figure 1 shows a document imaging system 1 according to a first embodiment of the invention, comprising a camera 2 and a camera controller unit 4 that are arranged to image a document 6 lying on a work surface 8. The camera may be hand-held, but for convenience is mounted atop a post 9 affixed to an edge 12 of the work surface 8. The document will typically be an A5, A4 or A3 size document, for example a sheet of printed paper, an open book, or a photograph.

35       The camera comprises an objective lens 14 and a strobe flash unit 16, both of which are directed at the document 6. The lens 14 has a field of view 18 sufficiently wide so that the lens can receive optical radiation 17 to image



the entire document 6 all at once. The strobe flash unit projects visible light 19 over an area 15 sufficiently wide that the document is uniformly illuminated. As will be explained in more detail below, the camera includes an  
5 image capture means, preferably an electronic detector (see Figure 3 reference numeral 52) and the strobe flash unit 16 is pulsed at a rate sufficiently quickly that to the human eye the illumination appears to be steady.

10 During one pulse of the strobe flash, the detector 52 captures an image of the document and sends an electronic signal comprising data representative of the image along a multicore connecting cable 22 to the camera controller unit 4.

15 Optionally, the camera may illuminate the document with more than one pulse if the light levels on the image capture means are too low, in order to build up an acceptable exposure. Multiple strobe flashes may also be  
20 useful if a lower aperture is needed for increased depth of field.

The camera 2 and strobe flash unit 16 may be powered either by a rechargeable battery (not shown) or from mains  
25 electricity via a lead 23.

Figures 2 and 4 show a second embodiment of the invention 101, in which identical features are labelled as in Figure 1, and similar features are labelled with reference  
30 numerals incremented by 100.

The camera 102 differs from the first embodiment in that the lens field of view 118 and illuminated area 115 are narrower, and able to image only about one-twelfth of the  
35 document 6. An actuator 24 is therefore provided between the camera 102 and the post 110.

The actuator 24 has two degrees of freedom of motion 26,30, one of which 26 is about a horizontal axis 28, and the other of which 30 is about a vertical axis 32. The  
5 horizontal axis is roughly transverse to an optical axis 34 of the lens 114. The degrees of freedom of motion 26,30 permit the camera 102 to be moved so that the strobe flash unit 116 and lens 114 can respectively illuminate and image successively the all areas of the document 6. The  
10 degrees of freedom of motion 26,30 need not be orthogonal, but in general it will be convenient if this is so.

The actuator has a lower plate 36 and an upper plate 38, the lower plate being affixed atop the post 110, and the  
15 upper plate being affixed to the camera 102. The camera may be either permanently attached to the actuator 24, or the camera may be removably attached, particularly if the camera 102 is removably attached to the actuator 24 and may be used separately from the actuator 24 as a hand-held  
20 camera.

A flexible bellows 40 extends between the lower plate 36 and upper plate 38. Concealed within the bellows is a horizontal axis pivot mechanism 42 and a vertical axis  
25 pivot mechanism 44, each of which may be driven by a small electrical motor 46,48. The maximum tilt afforded by the horizontal axis pivot mechanism 42 is about  $\pm 30^\circ$  and the maximum pan afforded by the vertical axis pivot mechanism 44 is about  $\pm 45^\circ$ .

30

The controller 4,104 may be a dedicated controller, but is preferably a personal computer with a controller card and software for controlling the camera 2,102, and in the case of the second embodiment 101, also the movement of the  
35 actuator 24.

Optionally, the actuator 24 may have manual controls 50 by which the tilt and pan may be set. For example, the manual controls 50 may be used to centre roughly the camera 102 on the document 6 to be imaged, prior to automatic control of pan and tilt by the controller 104.

In addition to controlling the orientation of the camera 102, the controller 104 acts as a shutter means to gate out from a two-dimensional detector array 52 data representative of an image on the array 52. This data is passed to the controller 104 via the multicore cable 122 and an electrical connection 51 through the actuator 24 and camera 102. The controller also controls via the multicore cable 122 and an electrical connection 53 through the actuator 24 and camera 102, the timing, and optionally also the intensity, of light pulses from the strobe flash unit 116.

In general, the camera 2,102 will have a lens 14,114 which can be focussed 57, either manually or automatically, with a depth of field sufficient to image an object, such as a document presented at an oblique angle to the optical axis 34 of the camera. In this sense, an object to be imaged is in the "object plane" if it is within the depth of focus of the lens.

Reference is now made to Figure 4. As mentioned above, the rate of which the strobe flash unit generates pulses 55 of light is sufficiently high that the illumination 19,119 appears to the human eye to be steady. In practice, the pulse rate should be at least about 50 Hz. Above 100 Hz, flicker cannot be perceived, and so there is no benefit to the perception of steady illumination, whilst the intensity of each pulse of light is decreased.

35

In both embodiments 1,101 of the invention, the strobe flash unit 16,116 is pulsed 55 at a rate that may lie between 50 Hz and 75 Hz at an intensity within an envelope 54 that ramps up 45 from about 40% of a maximum intensity  $I_M$  to the maximum intensity  $I_M$  over 0.38 second, is then constant 47 at intensity  $I_M$  for one second, and then ramps down 49 to about 40% of the maximum intensity  $I_M$  over a further 0.38 second. Ideally, the ramps would extend smoothly close to zero illumination. In practice, this is difficult to achieve with a flash lamp, which will need some minimum voltage to operate. The ramps 45,49 nevertheless serve the effect of making any stray light from the strobe less obtrusive.

15 Optionally, the frequency of the flash lamp pulses may rise from a relatively low rate as the flash lamp pulse intensity increases and/or fall from a relatively high rate as the flash lamp pulse intensity decreases. This will enhance the perception that the flash lamp average power is being ramped smoothly from and/or to zero average intensity.

During at least one of the pulses 55 when the intensity is constant, the camera 2,102 captures an image of at least a portion of the document 6.

In the case of the second embodiment, 101, the phase of constant illumination 47 may be extended to about 10 seconds to give the camera time to pan and tilt over the whole document 6, and to capture and transmit to the control unit 104 a number of images. Software in the control unit is then used to identify matching features in adjacent imaged areas 118 so that each image can be joined into a composite image of the document 6.

35

Electronic circuitry for driving the strobe flash unit 16,116 is preferably housed within the flash unit 16,116 and will now be described in detail with reference to Figures 5, 6 and 7. Figure 5 shows circuitry 60 which  
5 produces a constant pulsed illumination from a strobe lamp 61, for example of the type sold by EG&G Heimann Optoelectronics GmbH as part number DGS 5903. This strobe lamp 61 has a Xenon flash tube capable of producing a pulsed flash of visible light with a pulse width of less  
10 than 80  $\mu$ s with an energy of about 1 J per pulse and at a repetition rate of at least 50 Hz. In the case of providing illumination sufficient to overcome reflected glare on a glossy document, it is preferred if the pulse width is 20  $\mu$ s to 30  $\mu$ s. This level of illumination is  
15 adequate for detector arrays, but if the camera has photographic film, then a higher pulse energy may be needed, depending on the sensitivity of the film.

At 1 J per pulse and at a repetition rate of 75 Hz, the  
20 average power output of the strobe flash unit is 75 W, which is not so high so that any stray light will inevitably be distracting. At this power level, stray light will be perceived in the same way as a bright desk lamp being switched on, and then off again after an  
25 appreciable, but short time.

The circuit 60 receives 50 Hz ac mains power 200 at 240 volts rms. A 10 amp anti-surge fuse 62 protects a full wave rectifier 63 that supplies rectified voltage pulses  
30 59 ( $V_R$ ) at 100 Hz, as shown in Figure 6, to an input power rail connected to an input power rail 10 connected to the anode of a thyristor 64. The thyristor has a gate 65 wired to a secondary winding 66 of an isolating signal transformer 67. The secondary is in a 1:1 turns ratio with  
35 a primary winding 68 connected to a signal input TRIG\_C. Figure 6 shows schematically a series of thirty trigger

charge pulses 69 that can be applied to an input TRIG\_C 70 in order to gate the thyristor 64. The trigger charge pulses each have a width of  $10\ \mu\text{s}$  and a period of  $100\ \mu\text{s}$  and last for 3 ms, which is sufficiently long for the  
5 thyristor 64 to be put in conductive mode during one rising half cycle of the rectified voltage. The trigger charge pulses may be generated by the computer 4,104 and supplied to the circuitry 60 along cable 22,122.

10 The thyristor 64 therefore acts as a "charge gate" and the thyristor gate 65 and transformer 67 act as a "charge trigger" to the thyristor 64.

When the thyristor 64 is gated, current flows from the  
15 thyristor anode via a  $47\ \Omega$ , 50 W current limit power resistor 71 to an output power rail 20 to charge up a  $15\ \mu\text{F}$  storage capacitor 72 connected to a common line 73 from one side of the full wave rectifier 63. The current builds up a charge voltage 58 ( $V_C$ ) across the charge  
20 capacitor 72.

Because the series of trigger charge pulses 69 lasts for a duration of greater than one half cycle of the humps of the rectified voltage  $V_R$  59, the trigger charge pulses  
25 will always extend over a rising minimum of the rectified voltage 59. Once the thyristor 64 becomes conductive, it stays conductive until the charging voltage difference across the thyristor drops below about 5 V, close to the peak in the rectified voltage, which will be about 350 V.

30 Therefore, the start of trigger charge pulses 69 need not be synchronised with a zero crossing of the ac power input 200. The current limit resistor 71 limits the maximum current that can be supplied by the thyristor 64 in order  
35 to protect the thyristor from the otherwise very high

currents that would flow if charging is started near a peak of the rectified power input 59.

5 Current stored in the storage capacitor 72 is used following a trigger flash pulse 75 to pulse the flash lamp 61. A 68 k $\Omega$  bleed resistor 74 is wired in parallel with the storage capacitor 72 so that the storage capacitor 72 can discharge over a few seconds in the event that the flash lamp 61 is not triggered to pulse.

10 The trigger flash pulse 75 is applied via a signal input TRIG\_F 76 to a primary winding 77 of 1:1 turns ratio signal transformer 78. A secondary winding 79 of the transformer 78 has one end of the winding wired through a  
15 1 k $\Omega$  resistor and the other end of the winding wired to a gate 80 of a triac 81.

When the triac 81 is gated by a trigger flash pulse 75, current suddenly flows from a 100 nF capacitor 82  
20 connected to a node 83 held at half the charge voltage 58 between a pair of 82 k $\Omega$  resistors 84 connected across the charging capacitor 72. This current is pulled through a primary winding 85 of a signal transformer 86, which acts as a trigger coil for the flash lamp 61. One end of a  
25 secondary winding 87 of this signal transformer 86 is connected via the common line 73 to one end of the flash lamp 61. The other end of the secondary is wired to a glass envelope 89 of the flash lamp 61. The primary and secondary windings 85,87 have a 1:36 turns ratio. Because  
30 of this, and the very limited current that may flow in the secondary winding 87 owing to the connection to the non-conducting flash lamp envelope 89, the voltage across the secondary winding, and hence on the flash tube glass envelope rises to about 4000 volts. This high voltage  
35 triggers a break down in the Xenon gas inside the flash

lamp 61, which then flashes with a pulse of light lasting about 30  $\mu$ s, as the charging capacitor 72 discharges.

The triac 81 and transformer 86 therefore act as a "flash gate", and the triac gate 80 and transformer 78 act as a "flash trigger" to the triac 81 and transformer 86.

The operation of the circuit 60 can be appreciated with reference to Figure 6. The charge cycle is not synchronised with the mains cycle. First, there is a delay 90 between the trigger flash pulse 75 and a following trigger charge pulse 69 to allow the flash lamp 61 to quench, during which the impedance of the flash lamp 61 rises as ionised Xenon atoms recombine. Closely spaced trigger charge pulses 69 allow the charging capacitor 72 to charge when the rectified voltage  $V_R$  59 exceeds the charge voltage  $V_C$  58. The time constant presented by the current limit resistor 71 and charging capacitor 72 is less than 1 ms, sufficiently small that the charging capacitor can be fully charged in one cycle (i.e. one hump) of the rectified voltage  $V_R$  59. As the rectified humps occur at 100 Hz while the flash lamp pulses occur at 75 Hz, there are 1.5 humps per flash lamp pulse, which is more than adequate to charge fully the charge capacitor 72 whether or not the charge cycle is synchronised with the mains cycle.

Figure 7 shows a second circuit 160 that is capable of dimmably controlling the flash lamp pulses. Components in an upper portion 92 of the circuit which perform a similar function to those in the circuit 60 of Figure 5 are labelled with reference numerals incremented by 100.

There are two main differences between the circuit diagram upper portion 92 and the circuit of Figure 5. First, there



is no current limit resistor to limit current from the anode of the thyristor 164. This eliminates a relatively expensive component, and also improves overall efficiency of the circuit 160. In order to avoid high initial  
5 charging currents, charging of the charge capacitor 172 is synchronised with the mains cycle so that charging begins when the rectified voltage 159 is zero or close to zero and rising. The circuit diagram lower portion 93 therefore consists of a conventional zero crossing detector, the  
10 operation of which will be apparent to those skilled in the art, and which will therefore not be further described. The zero-crossing circuit 93 has an opto-isolator 94 that provides as an output a zero crossing signal ZCROSS 188. The zero crossing signal is fed along  
15 the connecting cable 22,122 to the computer 4,104 which then generates a series of thirty trigger charge pulses 169, as shown schematically in Figure 8 which are then applied to the trigger charge input 170. The thirty charge pulses each have a width of 10  $\mu$ s and a period of 100  $\mu$ s,  
20 which is sufficient for the thyristor 164 to be made conductive during the initial rise of rectified voltage  $V_R$ . The thyristor then stays conductive until the charging voltage difference across the thyristor drops below about 5 V, close to the peak in the rectified voltage, which  
25 will be about 350 V.

The second main difference is that the circuit upper portion 92 has a trigger discharge input TRIG\_D 95 that receives from the computer 4,104 one trigger discharge  
30 pulse 91 of 10  $\mu$ s duration. The trigger discharge input 95 is wired to the primary coil 96 of a signal transformer 97. The secondary coil 98 is wired to the gate 103 of a "discharge" thyristor 99. The discharge thyristor anode is connected in series with a 67  $\Omega$  bleed resistor 100. The  
35 thyristor 99 and bleed resistor 100 are connected in

parallel across the charging capacitor 172, so that when the thyristor 99 is gated by the trigger discharge pulse 91, current stored in the charging capacitor 172 is discharged. Since the trigger discharge pulse 91 comes  
5 after the charging capacitor 172 has reached its full voltage of about 350 V, there is no need for additional trigger discharge pulses to make the discharge thyristor 99 conductive. Once the discharge thyristor 99 is made conductive, it will stay conductive until the charging  
10 capacitor 172 is fully discharged.

Therefore, as shown in Figure 8, the energy stored in the charging capacitor 172 can be reduced after the charging of the capacitor 172 has reached its full value by waiting  
15 for an appropriate period of time 190, then applying a trigger discharge pulse 91 to the trigger discharge input 95 so that after a further period of time 191, the charge voltage  $V_C$  158 has declined to a lower value 192.

20 This reduction in stored energy is proportional to the amount of time that energy is bled off before the flash lamp 161 is fired. If the interval that energy is bled off is monotonically reduced over the course of multiple flashes, one would perceive a gradual increase in  
25 brightness. By holding this bleed interval steady or not triggering this bleed circuit at all for multiple flashes, the illumination will be perceived as steady. By then gradually increasing the bleed interval, the illumination brightness could then be ramped down. The resistance of  
30 the bleed resistor 100 may be chosen so that it is possible to substantially discharge the charging capacitor 172 before the next trigger flash pulse 175, as indicated by dashed line 201. In the present example, the flash lamp 161 is a custom Xenon flash lamp that can operate at  
35 between 225 V and 350 V. The energy stored in the charging capacitor 172 is given by  $\frac{1}{2}CV^2$ , so that the intensity of

the flash lamp flashes can reduced to about 40% of the maximum intensity.

Thus, by applying a trigger discharge pulse 91 to the trigger discharge input 95, the energy stored in the charging capacitor 172 can be controlled in order to dim by a constant amount, or to ramp up or ramp down the intensity or the flash lamp 161, as illustrated in Figure 4.

In the circuit 160, the synchronisation of charging with the mains frequency and the need for a bleed interval 191 results in a flash lamp pulse rate that is the same as the mains frequency, here 50 Hz.

The circuitry 60 of Figure 5 and the strobe flash pulse generation circuitry 92 of Figure 7 are preferably closely combined with the strobe flash unit 16,116 owing to the high currents supplied to the flash lamp 61,161. Circuitry for generating the low voltage control signals TRIG\_C, TRIG\_D and TRIG\_F is preferably part of a separate controller unit, such as the computer 4,104.

The invention therefore provides a convenient and relatively unobtrusive camera, particularly an electronic camera, a document scanning system and a method of using a camera to capture an image of a document. In the first embodiment of the invention 1, a document image can be captured all at once, at a resolution defined by the number of pixels on a detector array. If a 300 dpi resolution is required across an A4 page, then the detector may require 8 million pixels. A lower resolution and cheaper detector array, for example a conventional video camera detector array with VGA resolution, can be used to achieve the same image resolution if the document imaging system includes an actuator and controller by

which a plurality of adjoining images may be captured, and then combined to give a composite image of the document.

- 5 The steady strobe flash illumination is unobtrusive, and allows correct colour balance to be achieved, and well as reducing or substantially eliminating the effect of glare from a document with a glossy surface.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100

Claims

1. A camera (2,102) comprising an image capture means (52), an objective lens (14,114) with a field of view (18,118) to image optical radiation (19,119) from an object plane (8) onto the image capture means (52), a strobe flash (16,116) for illuminating the object plane (8), electronic pulse circuitry (60,160) to pulse (75) the strobe flash (16,116) at a rate which is sufficiently quick that the illumination appears to a user of the camera (2,102) to be substantially steady owing to persistence of vision, and a shutter means (104) to synchronise the capture of one or more images by the image capture means (52), each image being captured with at least one pulse (75) from the strobe flash (16,116), characterised in that the shutter means (104) is adapted to capture images at a rate substantially below the rate at which the strobe flash (16,116) is pulsed.
2. A camera (2,102) as claimed in any preceding claim, in which the pulse circuitry (160) is arranged to ramp up (45) the perceived intensity of the steady illumination prior to the capture of the image, and/or to ramp down (49) said intensity after capture of the image.
3. A camera (2,102) as claimed in Claim 2, in which the ramp up (45) and/or ramp down (49) of the perceived intensity of the steady illumination takes place over at least 0.25 second.
4. A camera (2,102) as claimed in Claim 2 or Claim 3, in which the ramp up (45) and/or ramp down (49) of the perceived intensity of the steady illumination takes place over less than 1 second.

5. A camera (2,102) as claimed in any preceding claim, in which the rate at which the strobe flash (16,116) is pulsed (75) is at least 50 Hz.

6. A camera (2,102) as claimed in any preceding claim in which the rate at which the strobe flash (16,116) is pulsed (75) is at least 10 times higher than the image capture rate.

7. A camera (2,102) as claimed in any preceding claim, in which the image capture means is an electronic detector (52) array, the shutter means comprising electronic control circuitry (104) to synchronise the capture of an image by the detector array (52) with the strobe flash (16,116).

8. A camera (102) as claimed in Claim 7, in which the camera (102) includes an actuator (24) to scan (26,30) the field of view (18,118) of the objective lens (14,114) in the object plane (8) as the control circuitry (104) captures images of different fields of view (118).

9. A camera (102) as claimed in Claim 8, in which the actuator (24) scans the field of view (118) of the objective lens (114) continuously as the control circuitry (104) captures images of different fields of view (118).

10. A camera (2) as claimed in any preceding claim, in which the camera is a hand-held camera (2).

11. A document scanning system (101) comprising a camera (102), the camera being as claimed in Claim 8 or Claim 9, and a mount (110) by which the camera (102) may be positioned to image onto the detector (52) a portion of a document (6) in the object plane (8), wherein the actuator (24) is operable to scan (26,30) the field of view (118)

of the objective lens (114) as the control circuitry (104) captures images of different portions of the document (6).

12. A document imaging system (101) as claimed in Claim 11, in which the system comprises means (104) by which images captured from adjacent or overlapping fields of view (118) can be joined into a composite image of the adjacent or overlapping fields (118).

13. A method of imaging a document using a camera (102), the camera being as claimed in Claim 8 or Claim 9, characterised in that the method comprises the steps of:

a) aiming the camera (102) at a document (6) in the object plane (8) so that a portion of the document (6) falls within the field of view (118); and

b) using the actuator (24) to scan (26,30) the field of view (118) of the objective lens (114) as the control circuitry (104) captures images of different portions of the document (6).

14. A method of scanning a document using a document scanning system (101), the document scanning system being as claimed in Claim 10 or Claim 11, characterised in that the method comprises the steps of:

c) mounting (110) the camera (102) to image onto the detector (52) a portion of a document (6) in the object plane (8); and

d) using the actuator (24) to scan (26,30) the field of view (118) of the objective lens (114) as the control circuitry (104) captures images of different portions of the document (6).

15. A method of scanning a document as claimed in Claim 14 when appendant from Claim 12, in which the method comprises after step d) the step of:

- 5 e) joining images captured from adjacent or overlapping  
fields of view (118) into a composite image of the  
document.



Abstract

Strobe Flash Photographic Illumination

5 The present invention relates to a camera (102) with  
strobe flash illumination (116) for capturing an image of  
an object (6), and to a document scanning system (101) and  
method of using such a camera (102) to capture an image of  
a document (6). The camera (102) comprises an image  
10 capture means, an objective lens (114) with a field of  
view (118) to image optical radiation (119) from an object  
plane (8) onto the image capture means (52), a strobe  
flash (116) for illuminating the object plane (8),  
electronic pulse circuitry to pulse the strobe flash (116)  
15 at a rate which is sufficiently quick that the  
illumination appears to a user of the camera (102) to be  
substantially steady owing to persistence of vision, and a  
shutter means (104) to synchronise the capture of one or  
more images by the image capture means, each image being  
20 captured with at least one pulse from the strobe flash.  
The shutter means (104) is adapted to capture images at a  
rate substantially below the rate at which the strobe  
flash (16,116) is pulsed.

25

Figure 2

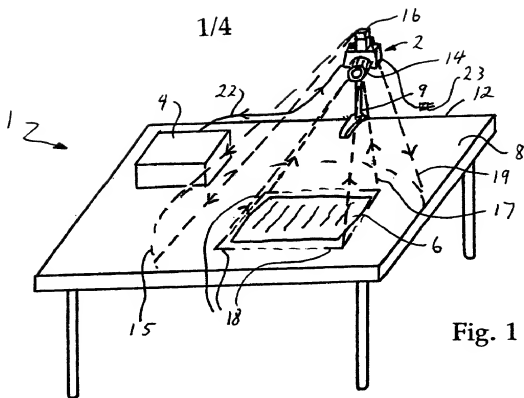


Fig. 1





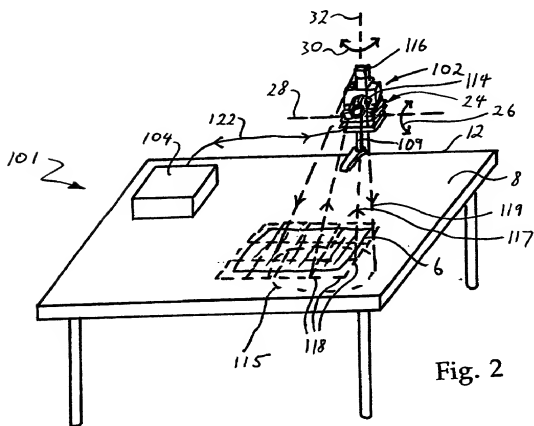


Fig. 2

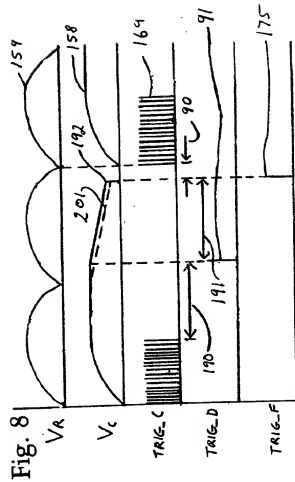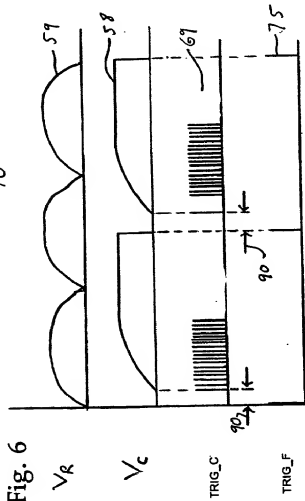

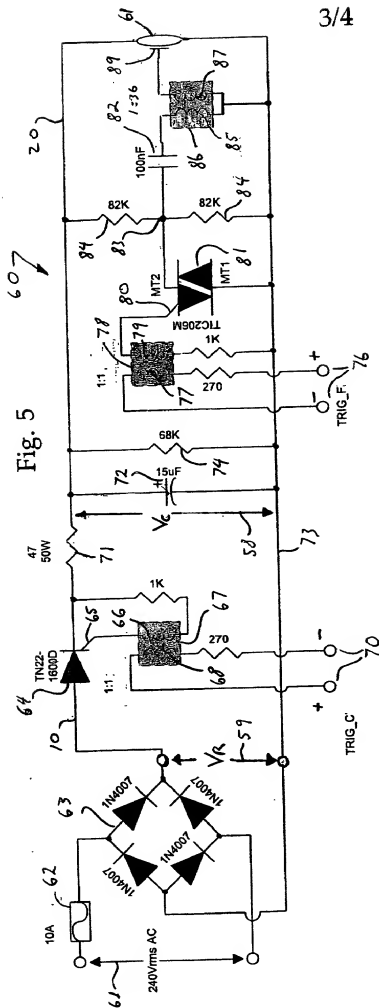

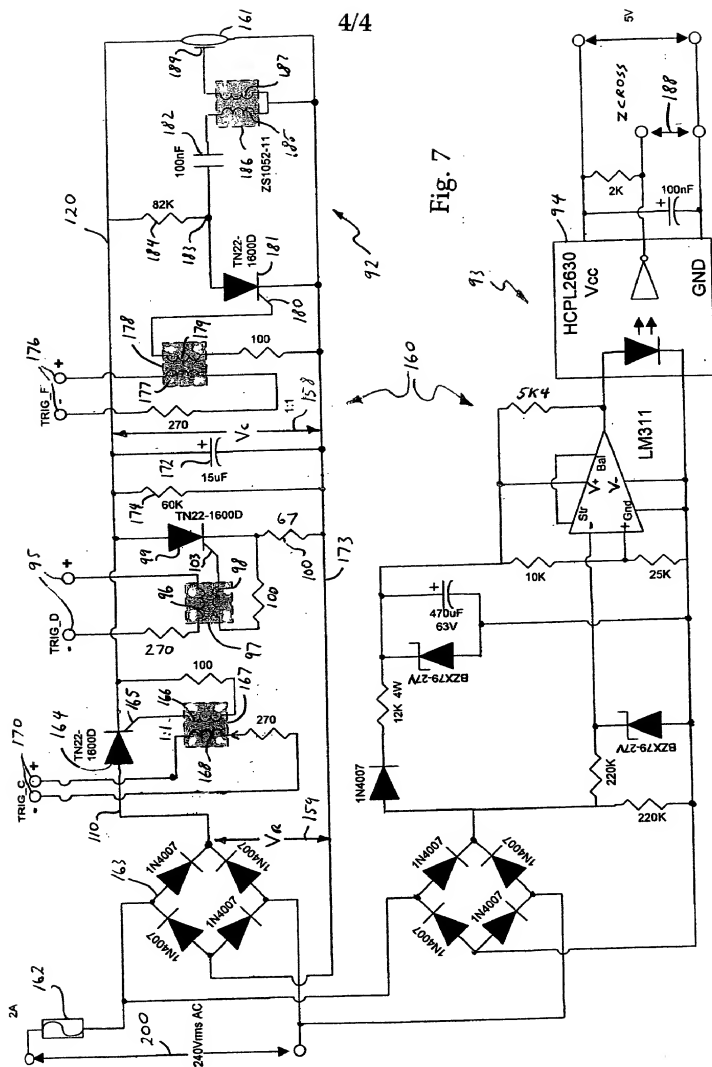

# DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

Attorney's Docket No.: 30990006 US

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Strobe Flash Photographic Illumination

the specification of which

X is attached hereto;

\_\_ was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_, and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56 (a).

I hereby claim foreign priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

Prior Foreign Application(s)	Priority Claimed
99304656.4 Number	EP Country
	15 June 1999 Day/Mo/Yr Filed
	<u>X</u> Yes __ No
_____ Number	_____ Country
	_____ Day/Mo/Yr Filed
	__ Yes __ No
_____ Number	_____ Country
	_____ Day/Mo/Yr Filed
	__ Yes __ No

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37,

Code of Federal Regulations, §1.56, which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial #)

(Filing Date)

(Status) (patented, pending, abandoned)

**POWER OF ATTORNEY:** As a named Inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Allan M. Lowe, Reg. No. 19,641

Israel Gopstein, Reg. No. 27,333

Benjamin J. Hauptman, Reg. No. 29,310

Kenneth M. Berner, Reg. No. 37,093

Michael G. Gilman, Reg. No. 19,114

Albert J. Fasulo, II, Reg. No. 43,607

Randy A. Noranbrock, Reg. No. 42,940

SEND CORRESPONDENCE TO:

DIRECT TELEPHONE CALLS TO:

Allan M. Lowe,

c/o Lowe, Hauptman, Gopstein Gilman & Berner

1700 Diagonal Road

Suite 310

Alexandria

Virginia 22314

USA

Allan M. Lowe, (703)-684-1111

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: Richard Oliver Kahn

Inventor's Signature: *Richard Oliver Kahn*

Dated: *19 April 2000*

Residence: 808 Jessie Street, Austin, Texas 78704, USA

Citizenship: US

Post Office Address: c/o 808 Jessie Street, Austin, Texas 78704, USA

Full name of 2nd joint inventor, if any:

Inventor's Signature:

Dated:

Residence:

Citizenship:

Post Office Address: